


Date: 02/2023



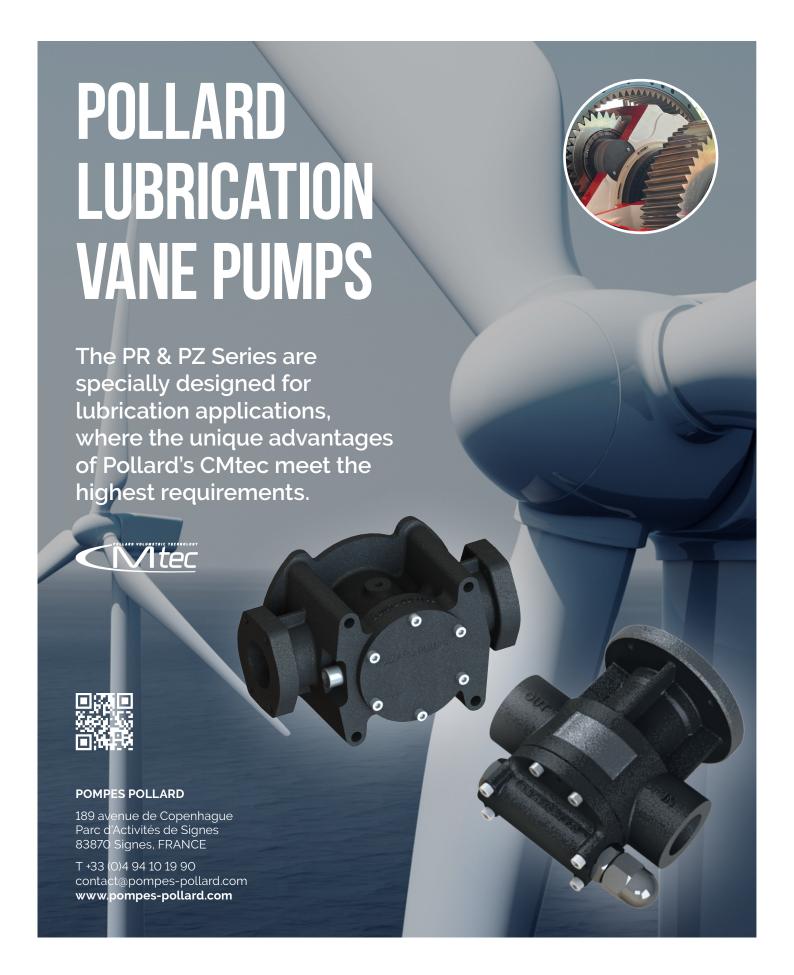


PERFORMANCE

Pollard lubrication pumps cover a large range of hydraulic performances, available with a large variety of design adaptations and optional features.

| Pump rotation speed | up to 3000 rpm (depending on model) |
|-----------------------|--|
| Differential pressure | up to 30 bar (depending on model) |
| Mounting | Externally mounted: threaded or with SAE flanges Cartridge type: integrated inside the frame of the gearbox |
| Dimensions | Standard or Customized: Thanks to an easily adaptable CMtec technology, Pollard offers direct dropin pumps, interchangeable with other competitors' pumps. |
| Design | Bare-shaft pump or complete electric motor-pump. |
| Options | Coupling adapted on demand. Bypass and non-return valves available on demand. |

POLLARD PUMPS' INTERCHANGEABILITY MAPPING

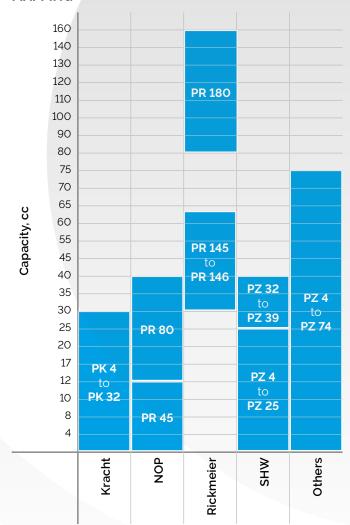

Contact our design office at **contact@pompes-pollard.com** for guidance in selecting your pump model.







